


SECTIONAAL DEUREN

SERIE M40




TECHNICAL SPECIFICATIONS	SET M40/665	SET M40/635D	SET M40/640D
Power:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz
Power rating:	200W	200W	200W
Max thrust:	650N	650N	650N
Frequency of use:	50%	50%	50%
Operating temperature:	-20 C° +55 C°	-20 C° +55 C°	-20 C° +55 C°
Protection level:	IP 40	IP 40	IP 40
Speed:	15 cm/s	15 cm/s	15 cm/s
Guide length AL:	3m	3,5m	4m
Maximum opening:	up to 2,3 m	up to 2,7 m	up to 3 m
Limitswitch:	Mechanical stopper in opening (optional in closing)	Mechanical stopper in opening (optional in closing)	Mechanical stopper in opening (optional in closing)
Encoder:	Magnetic	Magnetic	Magnetic
Onboard control unit	H70/14CC	H70/14CC	H70/14CC

Dimensions

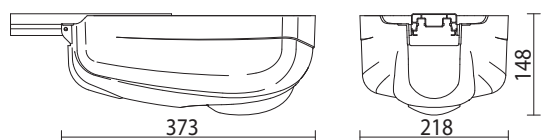

Dimensions track section



Dimensions

